



Operation

Bi-directional motor wing.

Frame

2 mm thick polished, shiny AISI 304 quality stainless steel

Wing

10 mm thick plexiglass. Led illumination. Optional: Tempered glass (60-70 cm)

Functions


Automatic closing. Service mode. Soft stop capability at locking points. Audio warning.

Mechanism

Fail-Safe (Free passage during power failure).

Emergency Mode

In case of emergency, the unit switches in to "emergency mode" following the signal received from manual button or fire detection system, and the wing can be opened in either directions automatically.

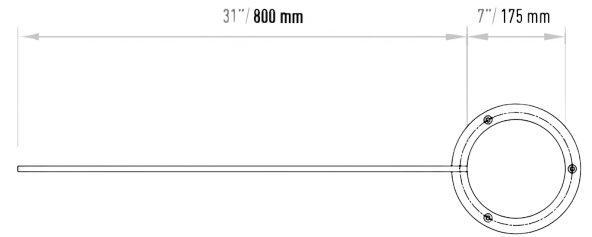

Operating Voltage	100-230 VAC. 47-60 Hz
Power Consumption	22W during passage,9W during standby
Operating Temperature	-0° / +70°
Opening-Closing Speed	1.5 sec.
Passage Width	60-90 cm
Weight	~40 Kg
Security Level	Deterrent
Areas of Use	Suitable for indoor use
Accessories	Remote control unit. Stainless steel opposite unit. Photocell with opposite unit. Meter. Stainless steel reading bracket. Stainless steel bottom plate. Logo engraving.

