



Operation

Bi-directional motor wing..

Frame

Two-legged, AISI 304 quality stainless steel.
Optional: AISI 316 quality.

Wing

Polished aluminum wing with 5 mm plexiglass in the middle.

Functions


Automatic closing. Service mode. Soft stop capability at locking points. Audio warning..

Mechanism

Fail-Safe (Free passage during power failure)..

Emergency

In case of emergency, the unit switches in to "emergency mode" following the signal received from fire detection system, and the wing can be opened in either directions automatically.

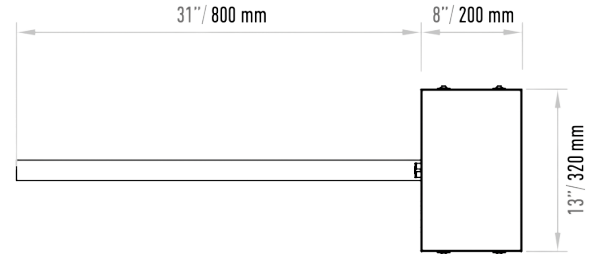

Operating Voltage	100-230 VAC. 47-60 Hz
Power Consumption	19W during passage, 9W during standby
Operating Temperature	-10° / +70°
Opening-Closing Speed	1.5 sec.
Passage Width	80-100 cm
Weight	~27 Kg
Security Level	Deterrent
Areas of Use	Suitable for indoor and outdoor use.
Accessories	Direction leds. Remote controller unit. Button control unit. Logo engraving. Photocell with opposite unit. Stainless steel reading bracket. Meter. Stainless steel bottom plate.

