



Operation

Adjustable manual passage to either direction.

Frame

Two-legged, angular lid, AISI 304 quality stainless steel.
Optional: AISI 316 quality.

Core and Arms

CNC-machined, aluminum cast core and polished. \varnothing 40x2.5 mm
aluminum arms Optional: Stainless steel arms..

Functions

Passage information (NC: Normally close or NO: Normally open).
Passage time. Memory mode. Audio warning. Adjustable passage
direction..

Mechanism


AISI 304 quality stainless steel. Fail-Safe (arms drop during power
failure) Optional: Fail Lock.

Emergency Mode

The arms fall down with the signal received from fire detection
system. Optional: Drop arm..

Indicator

Direction LEDs for both directions. Optional: Upper lid.

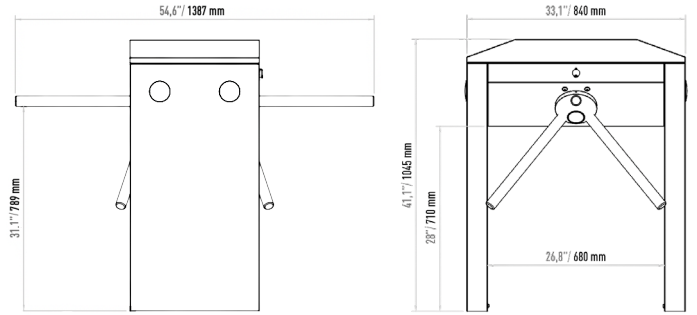

Operating Voltage	100-230 VAC. 47-60 Hz
Power Consumption	7.6W during passage, 8.2W during standby
Operating Temperature	-10° / +70° Optional: With heater -40°
Passage Speed	~50 persons / minute.
Passage Width	45-50 cm
Weight	~52,5 kg
Security Level	Deterrent
Areas of Use	Suitable for indoor and outdoor use.
Accessories	Outdoor cover. Unauthorized passage notification system. Button control unit. Remote control unit.

