



General

Stainless steel exit button.
(22mm contact diameter)

Features

DRB007F: Double contact

DRB007F-LK: LED illuminated - red, double contacts

DRB007F-LY: LED illuminated - green, double contacts


DRB007F-LM: LED illuminated - blue, double contacts

Execution

No Touch Exit Button Recessed Type

Technical Specifications

Exit button Contact Type	Double contact option
Exit button contact capacity	5A@125/250 VAC
5A@125/250 VAC	Sudden Impact
Contact Resistance	50 mU maximum
Operating Temperature	-20 degrees to +70 degrees

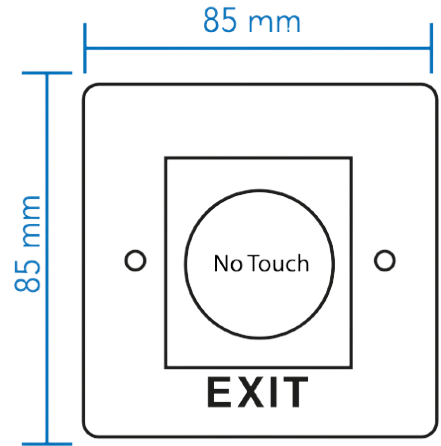

www.flytek.com.tr

Flytek Ltd. Şti.
8756 St. No:60 D.1/B Yenimahalle
Çiğli/İzmir

+90 232 423 43 59
+90 536 740 30 69
sales@flytek.com.tr