



General

FT-DRB000F Stainless Steel Exit Button Recessed
Type Single Contact CE Certified Stainless Steel Exit Button

Features

Stainless Exit button diameter: 19 mm

Ip67 Waterproof Exit Button


DRB000F-01-Single contact stainless exit button: NO

DRB000F-02- Double contact stainless output button: NO NC COM

DRB000F-LK- LED illuminated-red, double contact push button:
NO NC COM

DRB000F-LY- LED illuminated - green, double contact push button:
NO NC COM

DRB000F-LY- LED illuminated - green, double contact push button:
NO NC COM

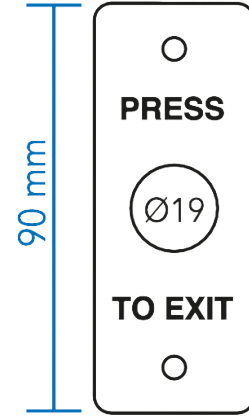

Exit button contact type	Single or Double contact option
Exit button contact capacity	5A@125/250 VAC
Exit button diameter	19 mm
Waterproof rating	IP67
Contact working mode	Sudden impact
Contact resistance	50 mU maximum
Operating temperature	-20 degrees to +70 degrees



www.flytek.com.tr

Flytek Ltd. Şti.
8756 St. No:60 D.1/B Yenimahalle
Çiğli/İzmir

+90 232 423 43 59
+90 536 740 30 69
sales@flytek.com.tr