



General Features

Operation

Controlled or control-free entrance/exit in both directions.

Chassis

AISI 304 quality stainless steel. Optional: Black stainless steel.

Wing

10 mm tempered glass that can open in either direction.
Optional: Smoke colored glass.

Upper Table

10 mm black tempered glass.

Functions

Works bidirectionally and allows the passage of a single person only with its microprocessor control, electronic passage memory feature saves in memory card swipes that occur before a passage is completed and allows them to pass without closing the wings.
Optional: 2 x RS232 and 1 x RS485 communication ports.

Mechanism

Wings are operated by means of a servomotor. Precision motor movement with 16 bit microcontroller and encoder support, and motor-locking in the event of unauthorized pass

Sensors

14 reciprocal sensors in every turnstile.

Emergency Mode



Turnstile switches to emergency mode upon the receipt of a signal from fire detection

Safety Level Setting

With 4 security levels that can be defined as desired by the customer, turnstile is able to detect unauthorized passes and passes in the opposite direction and emits an audio or discreet warning.

Indicator

Led lighting around the top plate and transition leds.

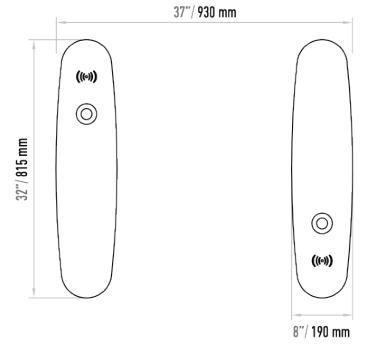

Operating Voltage	100-230 VAC. 47-60 Hz
Power Consumption	20W during passage,8W during standby (For two wings.)
Operating Temperature	0° / +55°
Passage Speed	60 persons / minute
Wing Speed	0.6 sec. (Opening-Closing)
Passage Width	55 cm
Weight	~105 Kg (Single Wing)
Security Level	Deterrent
Areas of Use	Suitable for indoor use
Accessories	Logo engraving. Sticker. Remote control unit. Stainless steel reader apparatus. Meter. Button control unit. Stainless steel reader leg. Stainless steel bottom plate.

