



Operation

Bi-directional motor wing..

Frame

Two-legged, AISI 304 quality stainless steel.
Optional: AISI 316 quality.

Wing

10 mm thick plexiglass.

Functions


Automatic closing. Service mode. Soft stop capability at locking points. Audio warning..

Mechanism

Fail-Safe (Free passage during power failure)..

Emergency

In case of emergency, the unit switches in to "emergency mode" following the signal received from fire detection system, and the wing can be opened in either directions automatically.

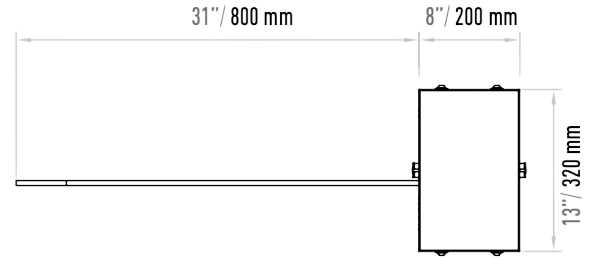

Operating Voltage	100-230 VAC. 47-60 Hz
Power Consumption	22W during passage, 9W during standby
Operating Temperature	0° / +70°
Opening-Closing Speed	1.5 sec.
Passage Width	60-80 cm
Weight	~34 Kg
Security Level	Deterrent
Areas of Use	Suitable for indoor use.
Accessories	Direction leds. Remote controller unit. Button control unit. Logo engraving. Photocell with opposite unit. Stainless steel reading bracket. Meter. Stainless steel bottom plate.

